

Idea



*PoE Signboard with LED Bar  
Designed for Meeting Room*

# XDS-1078

## 10.1" Interactive All-in-one Signboard



### Feature Highlight:

- 10-inch wide-view-angle touch display
- Compact design for easy table-top placement or wall-mount
- Professional memory management solution that prolongs memory lifespan
- Edge-mounted color LED light bars for conference room applications

### Industry:

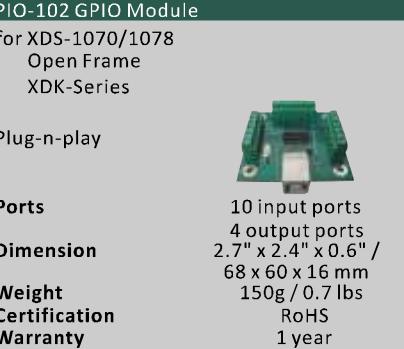


### Technical Specification:

- HTML5/SMIL/Android 4.4
- 10.1" 1280 x 800 resolution
- Multi-touch screen
- 300-nits brightness
- Wide view angle
- Power over Ethernet
- Ethernet 10/100 Base-T
- 802.11 b/g/n WLAN



# Signboard Comparison Chart

						
XDK-Series	XDK-Series	Open Frame	XDS-0548	XDS-1070	XDS-1078	
Flexible Signboard Kit	Professional Open Frame		5" Information Signboard	10.1" Commercial Grade Signboard	10.1" Interactive All-in-one Signboard	
<b>Features</b>						
One-wire installation via PoE	•	•			•	
LED illumination door sign					•	
Interactive touch screen			•		•	
Easy wall mount				•	•	
VESA MIS-D 75 mounting point		•		•	•	
3G dongle module	Option	Option		Option	Option	
NFC dongle module				Option	Option	
Robust storage solution via eMMC	•	•	•	•	•	
Fanless	•	•	•	•	•	
Hardware watchdog timer	•	•	•	•	•	
Smooth ticker	•	•	•	•	•	
<b>Management software</b>						
Programming API	HTML5+SMIL+Android	HTML5+SMIL+Android	HTML5+SMIL+Android	HTML5+SMIL+Android	HTML5+SMIL+Android	
3rd party software	•	•	•	•	•	
<b>Media format</b>						
Video format	H.264, MPEG 2/4 AVC	H.264, MPEG 2/4 AVC	H.264, MPEG 2/4 AVC	H.264, MPEG 2/4 AVC	H.264, MPEG 2/4 AVC	
Max. video resolution	1920x1080, 30fps	1920x1080, 30fps	1920x1080, 30fps	1920x1080, 30fps	1920x1080, 30fps	
Image format	JPEG, PNG	JPEG, PNG	JPEG, PNG	JPEG, PNG	JPEG, PNG	
Max. image resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	
Audio format	MP3	MP3	MP3	MP3	MP3	
<b>Hardware specification</b>						
Screen Size	10.1", 15.6", 18.5", 21", 23.6"	10.1", 15.6", 18.5", 21", 23.6"	5"	10.1"	10.1"	
Max. screen resolution	Per panel selection	Per panel selection	800 x 400	1280 x 800	1280 x 800	
Brightness (nits)	Per panel selection	Per panel selection	300	300	300	
Viewing angles (H/V, CR>10)	Per panel selection	Per panel selection	140 x 120	160/160	160/160	
Build-in speaker	N/A	N/A	1W x 1	2W x 2	2W x 2	
Local storage	8GB	8GB	8GB	8GB	8GB	
Wi-Fi/Bluetooth	802.11 b/g/n, BT4.0	802.11 b/g/n, BT4.0	802.11 b/g/n, BT4.0	802.11 b/g/n, BT4.0	802.11 b/g/n, BT4.0	
	HDMI out	HDMI out	Micro USB port	3.5mm stereo audio	HDMI out	
	3.5mm stereo audio	3.5mm stereo audio	3.5mm stereo audio	USB ports	3.5mm stereo audio	
	USB ports	USB ports	Micro SD card slot	ADB port	USB ports	
	ADB port	ADB port	Reset button	Ethernet port	ADB port	
I/O ports	Ethernet port	Ethernet port		Micro SD card slot	Ethernet port	
	MicroSD card slot	Micro SD card slot		Power jack	Micro SD card slot	
	Power jack	Power jack		Reset button	Power jack	
	Reset button	Reset button		Kensington lock	Reset button	
Power adapter input	100V-240V	100V-240V	100V-240V	100V-240V	100V-240V	
Power adapter output	Per panel selection	Per panel selection	5V2A	12V 1.5A	12V 1.5A	
Operation temperature	0-40C	0-40C	0-40C	0-40C	0-40C	
Humidity	5-85% @ 45 degree non-condensing	5-85% @ 45 degree non-condensing	5-85% @ 45 degree non-condensing	5-85% @ 45 degree non-condensing	5-85% @ 45 degree non-condensing	
Certification	Per request	Per request	CE/FCC/RoHS	CE/FCC/RoHS	CE/FCC/RoHS	
<b>Warranty</b>						
Parts & labor	1 year	1 year	1 year	1 year	1 year	

This preliminary information is subject to change, please contact sales for information update.



Edustus ja maahantuonti:  
FinnAV Oy MediaSolution  
Kantelettarentie 7 R  
00420 HELSINKI  
Puh. 09 - 879 5639  
info@mediasolution.fi  
www.mediasolution.fi