

LTC-S2007 Lecturer Tracking Camera STC-S2007 Students Tracking Camera




We are happy to release LTC Series advanced Lecturer Tracking Camera and STC series Student Tracking Camera!

The new tracking camera adopts the most state-of-the-art face recognition and motion tracking technology, it can precisely lock and track lecturer all around the whole classroom automatically, free of other moving or lighting interference, no need to wear any sensor, completely unmanned, dual lens both with up to 1080p60 format and HD-SDI interface, almost zero setup.

The student tracking camera can precisely detect student's standing & sitting behavior, then gives them close-up or full view image accordingly, all done automatically.

Application Explanation

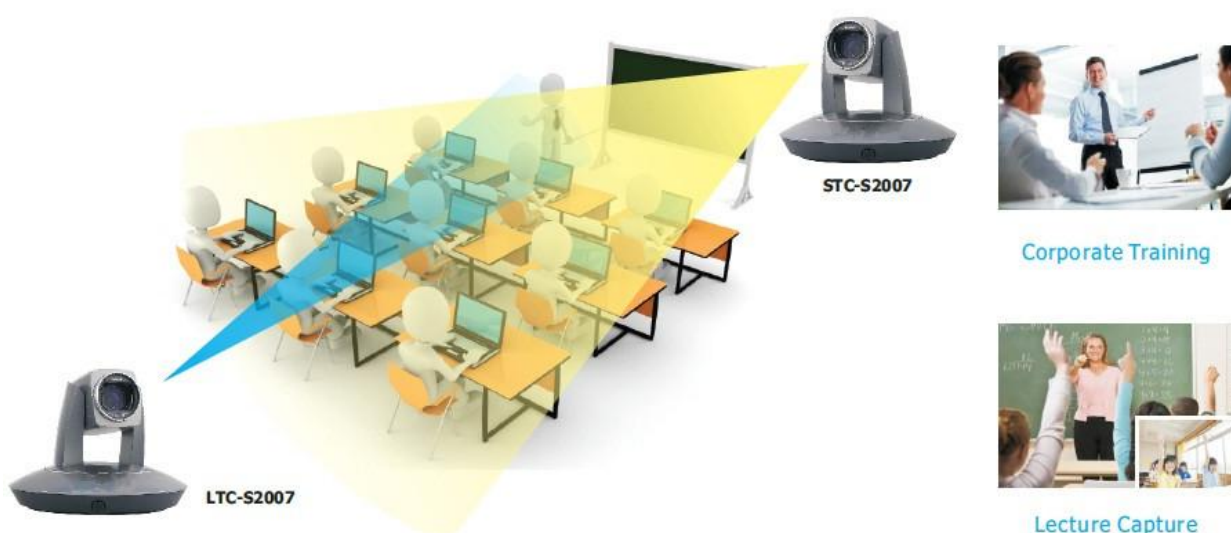

Function

LTC-S2007 Lecturer Tracking Camera

Precisely Lock & Track a specific object
Free from any light/moving interference
1x Priority tracking area + 8x blocking zones
No limit to tracking area
Auto zoom in/out during tracing
Smooth & Intelligent tracking capability
Easy setup & Configure

STC-S2007 Lecturer Tracking Camera

Precisely detect students's standing & sitting behavior, then give them close-up or full view image accordingly
No limit to tracking area
Auto zoom in/out during tracing
Smooth & Intelligent tracking capability
Easy setup & Configure


Technical Date

Model	LTC-S2007	STC-S2007
Function	Lecturer Tracking Camera	Students Tracking Camera
Tracking Camera		
Image Sensor	1/2.8" Exmor CMOS 2,140,000 Pixels	
Lens	f=4.9mm - 94mm; F1.6-F 3.5	
Zoom	Optical:20X; Digital: 12X	
Field of View	59.5° - 3.3°	
Focus	Auto, Manual, One Push	
Min.Illumination	0.5 Lux	
Shutter Speed	1/1 to 1/10,000s	
Gain	Auto/Manual	
White Balance	Auto, Manual, Outdoor, One Push, Manual	
Exposure	Auto, Manual, Shutter Pri, Iris Pri	
S/N Ratio	≥50dB	
Panoramic Camera		

Image Sensor	1/3" CMOS
Effective Pixel	2,100,000 Pixels
White Balance	Auto
Exposure	Auto
Focus	Manual
Lens	3.73mm
Field of View	Horizontal: 92°; Vertical: 50°
PTZ	
Pan/Tilt Angle	Pan Range: - 170° - +170°; Tilt --30°- +90°
Pan/Tilt Speed	Pan:0.1° -160° /sec,Tilt:0.1° -120° /sec
Preset Number	256
Comm. Interface	RS-485, RS-232
Protocol	PELCO-D/P VISCA
Video	
Video Output	HD-SDI(2 channel)
Video Format	HD:1080p/60, 1080p/50, 1080p/30, 1080p/25, 1080i/60, 1080i/50, 720p/60, 720p/50, 720p/30, 720p/25 SD: NTSC, PAL
General	
Power Supply	DC12V
Power Consumption	<15W
Working Temp	0°C - +40°C
Storage Temperature	-20°C-+60° C
Dimension	226mm x 163mm x 212mm
Weight	1.96kg
Color	Grey

* Design and specifications are subject to change without notice.

Rear View & Installation



- 1 Reserved
- 2 Upgrade Port
- 3 HD-SDI 1
- 4 HD-SDI 2
- 5 RS232+RS485
- 6 Power



Wall mount



Pendant mount

??? Product specification are subject to change without notice ???

www.winsafecctv.com



Edustus, maahantuonti ja markkinointi:
 FinnAV Oy MediaSolution
 Kantelettarentie 7 R, 00420 Helsinki
 puh. 09 879 5639, myynti 0400 716 106
 info@mediasolution.fi,
 www.mediasolution.fi