

---

# USB3.0 SINGLE INTERFACE SERIES

TLC-200 Series USB3.0/USB2.0 Fixed Webcam

---





TLC-200 Series  
USB3.0/USB2.0 Fixed Webcam




Telycam TLC-200 series adopts advanced ISP, Panasonic 1/2.8 2MP sensor and 4K lens, to provide crystal clear and full high definition video streaming for individual desktop and huddle room video collaboration at competitive price.



## FEATURES

- Full HD 1080p/30 video stream output
- 108 and 85 degree super wide field of viewing optional
- 4x digital zoom, lossless image quality with 4K lens
- Plug&Play, single USB cable for video, control and power
- USB3.0 YUY2 and USB2.0 YUY2&MJPG video format, works with Windows, Mac OS, Android, Linux;
- Standard UVC1.5 protocol, compatible with most VC software and platform: Zoom, Skype for business, Vidyo, BlueJeans, Webex, Google Hangout, Trueconf, Gotomeeting ect
- Wide dynamic range , 3D noise reduction, Back light compensation, Anti-flicker adjustable;
- Flexible hinge design: fit for monitor/PC, tripod and on desk mounting;

Dimensional Drawing ( mm)

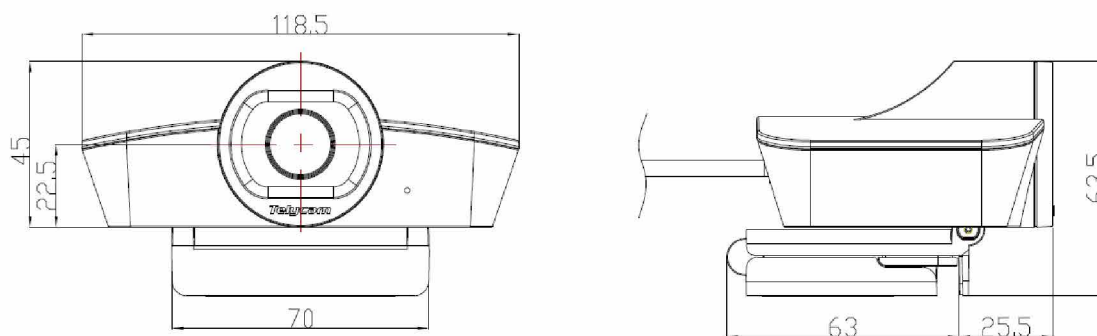

## TECHNICAL SPEC

|                            |  |               |  |   |
|----------------------------|--|---------------|--|---|
| Mode Number                | TLC-200  |               |  |   |
| Product Type               | USB3.0 Series  |               | USB2.0 Series                            |   |
| Model Number               | TLC-200-U3-108   | TLC-200-U3-85 | TLC-200-U2-108                           | TLC-200-U2-85   |
| Sensor                     | 1/2.8 inch high quality, 2.1MP SONY CMOS sensor  |               |  |   |
| Video Format               | YUY2   | YUY2          | YUY2                                     | MJPEG H.264   |
| Resolution/-<br>Frame Rate | USB3.0:<br>1920x1080P/30/25,<br>1280x720P60/50/30/25;<br>USB2.0:<br>1280x720P25, 960x540P30,<br>704x576P30,<br>640x360P30, 352 x 288P30; |               | 1280x720P15/10/5;<br>640x360P30/15/10/5; | 1920x1080P30/25/20/15/10/5,<br>1280x720P30/25/20/15/10/5,<br>720x576P30/25/20/15/10/5,<br>640x480 P30/25/20/15/10/5,<br>320x240P30/25/20/15/10/5; |
| Lens                       | 12MP Fixed Lens  |               |  |   |
| View Angle                 | 108°   | 85°           | 108°                                     | 85°   |
| Focal Length               | f = 2.27mm   | f = 3.0mm     | f = 2.27mm                               | f = 3.0mm   |
| Digital Zoom               | 4X   |               |  |   |
| S/N Rate                   | >50dB  |               |  |   |
| Minimum Lux                | 0.1 lux  |               |  |   |
| White Balance              | Auto / Manual/Indoor/Outdoor   |               |  |   |
| Iris                       | F 1.8  |               |  |   |
| Electronic Shutter         | Auto   |               |  |   |
| Anti Flicker               | 50HZ/60HZ/OFF  |               |  |   |
| BLC                        | ON/OFF   |               |  |   |
| Input Voltage              | DC5V (USB3.0/USB2.0 port)  |               |  |   |
| Dimension                  | 118.5 x 88.5 x 63.5 (mm)   |               |  |   |
| Control Port               | USB3.0   |               | USB2.0                                   |   |
| Video Port                 | USB3.0   |               | USB2.0                                   |   |
| Net Weight                 | 0.3KG  |               |  |   |