




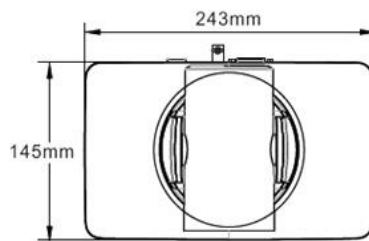

Features

- ※ H.265 video compression,dual stream
- ※ Compatible with ONVIF,RTSP.RTMP protocols
- ※ With OSD menu,support image flip
- ※ Come with IR remote controller
- ※ Support standard VISCA & Pelco communication protocols
- ※ RS232IN/IR RS232OUT/RS485 control interface,support daisy chain,
- ※ Special mechanical PTZ driving system,ensure precise positioning

Dimensional Drawing

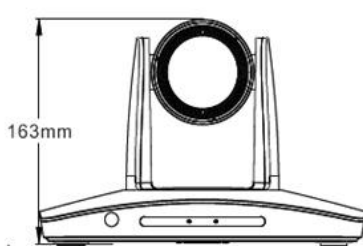

- | | |
|------------|--------------------|
| ① USB | ⑥ Audio |
| ② TF card | ⑦ RS-232IN/IR |
| ③ Ethernet | ⑧ RS-232OUT/RS-485 |
| ④ DVI-D | ⑨ DC12V |
| ⑤ HD-SDI | |

Technical Specification

Model No.	AMC-E210NV2	AME-E200NV2	AMC-E220NV2
Camera			
Image Sensor	1/2.8" Exmor CMOS, 2.14MP		
Video Standard(HD)	1080p/60,1080p/30,1080i/60,720p/60,1080p50,1080p25,1080i/50,720p/50		
Focal	f = 4.7mm -47mm	f=3.9mm-46.8mm	4.7mm-94.mm
IRIS	F1.6 - F2.8	F1.6 - F2.8	F1.6 - F3.5
Optical Zoom	10X	12X	20X
Digital Zoom	12X		
Field of View	60.4° - 6.43°	72.5° - 6.3°	59.5°- 2.9°
Focus	Auto, Manual, PTZ Trigger AF, One push		
Min.Illumination	0.5Lux(Color), 0.1Lux(B/W)		
Shutter Speed	1/1 - 1/10,000s		
AGC	Auto/Manual		
White Balance	Auto, Indoor, Outdoor, One push, Manual, Auto Track		
AE Control	Auto, Manual, Shutter Priority, Iris Priority,Intelligence		
Pan/Tilt			
Pan Range	-170° - +170°		
Tilt Range	-30° - +90°		
Pan Speed	0.1° - +120°/s		
Tilt Speed	0.1° - +80°/s		
Preset Number	256		
OSD	Yes		
Image Flip	Yes		
Network			
Max,Image Size	1920x1080 @60fps		
Frame Rate	HD:50Hz:50fps(1920x1080) 60Hz:60fps(1920x1080)		
Video Compression	H.265,H.264		
Audio Compression	AAC		
Protocol	HTTP,RTSP,RTMP,RTP,TCP,UDP,ONVIF		
Dual Stream	Support		
Simultaneous Users	up to 10 users		
Interface			
HD Video Output Interface	DVI-D,HD-SDI		
Audio	One Line In, One Line Out		
Control Interface	RS-232IN/IR, RS-232OUT/RS-485		
Ethernet	RJ45,100M		
USB	USB2.0		
Local Storage	TF card, up to 64GB		
Control Interface	RS-232IN/IR, RS-232OUT/RS-485		
General			
Control Protocol	VISCA and Support Daisy Chain, PELCO-D, PELCO-P		
Address	0 - 63		
Power Supply	DC12V		
Working Temp	0°C - +40°C		
Storage Temp	-20°C - +60°C		
Dimension	243mm x 145mm x 163mm		
Weight	1.2KG		
Color	Grey		

***** Product specification are subject to change without notice *****