



AVer™ Comm H300

Videoconferencing For Everyone



Gather Everyone at the Headquarter, in One Minute

With an affordable price, a 4-sites MCU and the integrated recording feature, AVerComm H300 helps headquarters to manage information and resources from everywhere and save time and money wasted on business trips.

4-sites Multipoint

Accessing only one AVerComm H300 allows you to gather people from three other places and meet as everyone is in the same room.

Meeting Recording

Simply plug in a USB storage device and press a button, and you can have all the videos and shared contents recorded, archived and reviewed afterward.

Affordable Price

AVerComm H300 can help you to save a lot of time and money from business trips at an unprecedentedly affordable cost, making the most of your investment.

Green

Less business travel not only saves costs, but also reserves energy and reduces carbon emission. A simple change you make will help to improve the climate change and reduce energy consumption.

HD

4-site
Multipoint

5M pixels
Camera

7X
zoom


Content
Sharing

Dual
Monitor

Meeting
Recording

*HD Quality
Videoconferene
System*

Easy - Setup

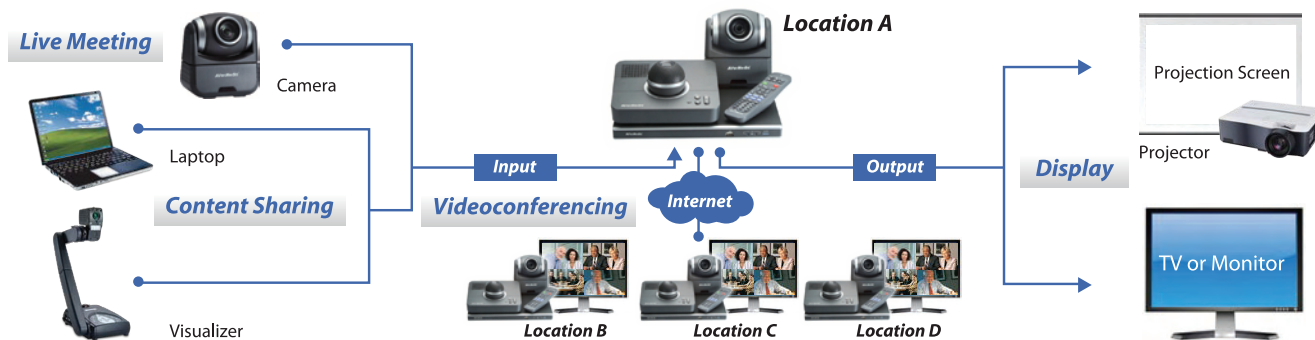

Specifications

System Includes	Camera
AVer™Comm H300 Codec unit	AVerMedia-designed, 5 Megapixel Camera
HD quality PTZ Camera	7X Optical Zoom
Table Hub	PTZ function
Microphone	Video Inputs
IR Remote Control	PTZ Camera Input
Connection cables	Composite Video(RCA) Input
Communications	S-Video Input
H.323 standard	VGA Input (For dual stream content)
128Kbps ~ 4Mbps	Video Outputs
1xRJ-45 network LAN (10/100Mbps)	VGA Output X2
Manual bandwidth setting	Composite Video(RCA) Output
Display	S-Video Output
Support NTSC/PAL/XGA(4:3 RGB)/720p(16:9 RGB) display	Audio Features
Support Single and Dual Monitor display	Echo Cancellation
Multiple meeting video and content layout styles	Auto Gain Control
Simple, friendly, and stylish User Interface	Noise Suppression
Site-name edit/display	Audio Standards
Video Standards	G.711, G.722, G.722.1, G.728, G.722.1C
H.264, H.263, H.263+, H.261	Audio Inputs
H.239 dual video streams	3.5 mm Phone Jack Audio Input
Video Features	Audio Outputs
30fps from 128Kbps	3.5 mm Phone Jack Audio Output
Support meeting video resolutions:	Embedded 10W speaker
- QSIF(176x120), QCIF(176x144)	Video Conference Auxiliaries
- SIF(352x240), CIF(352x288)	Meeting Recording Function
- 4SIF(704x480), 4CIF(704x576)	- Store meeting record in your USB drive
- 720p(1280x720), 30fps	- Support playback and layout function as live meeting (AVerComm VCplayer™ included)
Support content video resolutions:	Snapshot Sharing function
- VGA(640x480)	- With 5M pixel camera, snap-shot image and share with meeting members
- SGA(800x600)	- Zoom/Pan the captured images
- XGA(1024x768)	Others
- SXGA(1280x1024)	Support UPnP NAT Traversal
Support Rate Control mechanism	Support Gatekeeper and H.460 Firewall Traversal
Support H.239 content stream shared from local or remote side	Far-end camera control
Multi-sites Features	Programs updatable from Ethernet or USB drive
H.323 Standard	Up to 10 preset points
MCU up to 4 sites	Upload and manage phone book by internet
Content sharing from any sites	Packet loss detection

Connectors

Codec Unit

Output

Composite
S-Video
3.5mm Phone Jack

VGA Output

Input

Composite
S-Video
3.5mm Phone Jack

NTSC/PAL Switch





Table Hub

VGA Input/Output

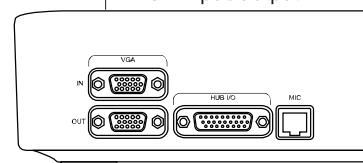

Distributor / Dealer :