
Media Master Bee3 plus

The most reliable, all-in-one video production system, that's equipped with a 10.1-inch touch screen and web page to operate everything. Bee3 PLUS supports to Record, stream, and switch 2 HD inputs from 2 local connections and IP camera to take your video production to the next level.



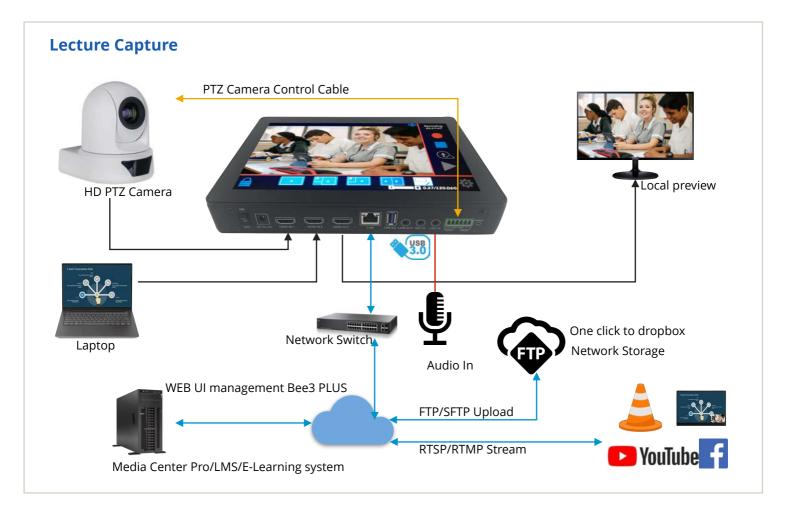

Benefits:


Easy to use - turnkey system with everything you need to capture and stream multi sources video productions with one touch

Scalable - affordable and maintenance free system

Live - stream live on youtube, facebook, vimeo or any other CDN

Seamless integration - into the video platform of your choice

Rear Panel:

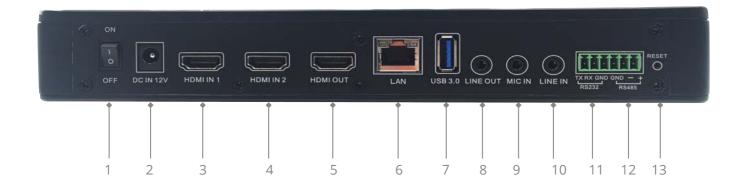

No.	Connector	Description	
1	Power switch	Power on & Power off	
2	Power IN	DV 12V/5A power input	
3	HDMI IN1	HDMI 1.4 together with audio input, Maximum support 1080P@60 input, Compatible to DVI 1.0 specifications	
4	HDMI IN 2	HDMI 1.4 together with audio input, Maximum support 1080P@60 input, Compatible to DVI 1.0 specifications	
5	HDMI OUT	HDMI 1.4 together with audio output, Maximum support 1080P@60 input, Compatible to DVI 1.0 specifications	
6	LAN	1 Gigabit network interface,RJ45	
7	USB 3.0	USB 3.0 interface, connect USB devices to download medias	
8	LINE OUT	Playback line out	
9	MIC IN	Mic in Unbalanced	
10	LINE IN	3.5mm Line in(Unbalanced)	
11	Control port	RS232 control port for camera PTZ control or 3rd party control system	
12	Control Port	RS485 control port for camera PTZ control	
13	RESET	Reserved	

Technical Parameters:

Video input	HDMI x 2, IPC x 1, RTMP, RTSP			
Audio input	Line in and mic in, hdmi audio			
Video output	1x HDMI for video output locally			
Audio output	HDMI, Line out			
	Codec	Н.264		
Video encoding	Bitrate	1 to 30 Mb/s		
	Resolutio n:	User selectable up to 1920 × 1080		
Video switching	During live streaming and re cording via the touch screen, web UI, 3 rd party control system			
Streaming protocol	TS, RTSP, UDP, RTMP (support publish to youtube, twitter, facebook)			
Recording	Real time, Time-Lapse			
Video layout	PIP, POP, Single video, Size by size and up to 10 groups of layout			
Encoded programs	2 simultaneous 1080p programs at 30 fps (with up to 2 Full HD sources)			
Audio encoding	AAC (sampling @ 48 kHz)			
	One-button lock screen			
Security	User management and Password login			
Network	1 ×1000 Ethernet port (RJ45)			
	Hard disk	2T		
Storage	USB 3.0	Automatic or manual copy via 1 USB 3.0 ports		
Network Storage	SFTP, FTP,SCP, Dropbox(optional)			
Recording formats	Mp4			
Control	Browser, 10.1' touch screen, RS232 API, Telnet			
Remote control camera	Pan/Tilt/Zoom over RS485 API			
Dimensions ($W \times D \times H$)	256 x 175 x 37 (mm)			
Power Consumption	30W			